


SK-7003 Pointing Procedure

The following information will allow you to manually point a Trav'ler SK-7003 system on signal that was manufactured prior to August 23rd, 2017.

Note: The receiver must be on Port A, B, or D of the Trav'ler SK-7003 for the following procedure to be successful. The procedure will not work if receiver is connected to Port C.

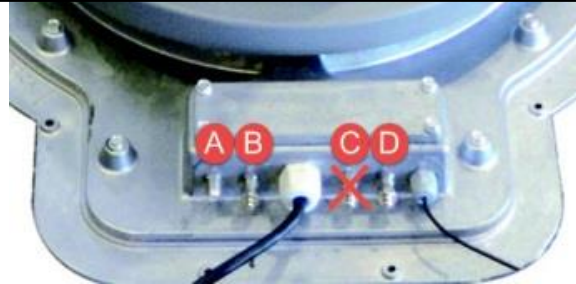

Channel Reference Table:

| Classic CH. # | Advance CH. # | One National CH. # | Channel Description | Channel |
|---------------|---------------|--------------------|--------------------------|---------|
| 35 | 535 | 135 | City TV Toronto HD (MP4) | CITY HD |
| 32 | 532 | 131 | Global Toronto HD (MP4) | GBL HD |
| 34 | 534 | 133 | CTV Toronto HD (MP4) | CTV HD |
| 33 | 533 | 132 | CBC Toronto HD | CBC HD |

1. Turn on your TV & Shaw receiver. Press the **"Guide"** button and set the receiver to 1 of the 4 Satellite 111° channels above using the numeric keys.

Note: There are 3 different channel numbers listed for each channel depending on your specific channel map (Classic, Advance, One Nation). Make sure that the channel you have chosen matches the "Channel Description/Channel" columns in the Channel Reference Table above before proceeding to the next step.

2. Press the **"Options"** button on the remote.
3. Press the **"Status"** button on the remote.
4. Press the **"System Status"** button on the remote.
5. Press the red **"A"** button on the remote.
6. You should now have a signal meter screen with a TV window in the upper right corner. If you do not see a signal meter screen then you may need to repeat steps 1-5.
7. Launch a search of the Winegard SK-7003 Trav'ler by pressing and holding the IDU **"Power"** button for at least 3 seconds to initiate a search.
8. Monitor the TV window and signal strength meter. Once you observe an active picture in the TV window and the signal strength is in the mid-90s, power off your Trav'ler by pressing the Trav'ler IDU control box **"Power"** button and **"Select"** button simultaneously. This dual button press sequence will power off the Trav'ler immediately in the correct position for operation on 107° and 111°.
9. Press the **"Exit"** button to exit out of the signal meter screen. You should now be able to watch TV on all available subscribed channels.